

Big Wheel Slider Instruction Manual

- Thanks for your purchase. Please read this Owner's Manual completely before assembling or operating this product.
- Assembly of this product should be carried out by an adult.
- Please ensure you follow the assembly instructions, as some parts must be installed before others.
- Not suitable for children under 8 years contains small parts.
- Always wear an approved safety helmet when riding. Always wear fully enclosed shoes.
- Never leave your child unattended on this product.
- Not permitted for use on public roads or highways.
- Don't use at night. Don't use on wet surfaces, uneven or unpaved roads.
- It is not recommended that slider is used on steep slopes or at high speed.
- Always check brakes before riding.
- Not designed for stunt riding.
- **Max user weight : 80kgs**



Do not return this product to the store!

If any parts are missing or damaged, please contact one of our Customer Service Representatives by phone on


1800 632 792(Australia)

0800 623 792(New Zealand)

PARTS LIST



Part No.	Description	Quantity
1	Main Frame	1
2	Front fork	1
3	Front wheel assembly	1
4	Handlebar	1
5	Pedals	1 set
6	Rear tube	1
7	Rear axle	1
8	Rear wheels	2
9	Seat	1
10	6x30mm bolt and nut	4 sets
11	8x50mm carriage bolts and nuts.	2 sets
12	6x25mm Allen bolts and nuts	2 sets
13	M8 washer and nut	2 sets

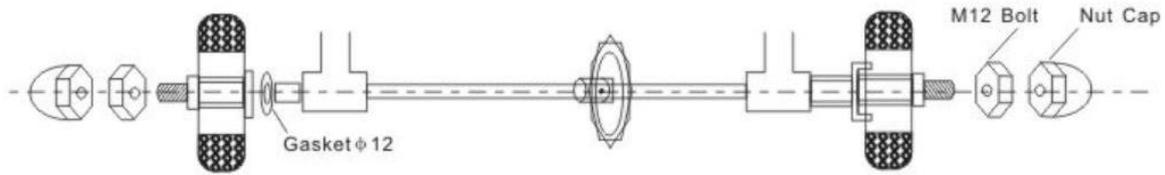


ASSEMBLY

1. Front Wheel Assembly



Insert front wheel assembly (part 3) into the open ends of the Front fork (part 2). Attach the two end covers and secure with bolt and nut (part 11)
Repeat for the other side.

2. Stem Assembly

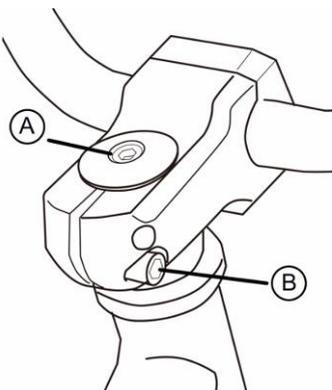

The stem is pre-assembled .If necessary, rotate the stem and fork to face the forward position. Ensure the stem is aligned with the front fork and facing the correct direction.

Tighten the top bolt (A) of the stem and the stem bolts (B).



WARNING: If the handlebar clamp is not tight enough, the handlebar can slip in the stem. This can cause damage to the handlebar or stem, and can cause loss of control.

3. Assemble The Handlebar To The Stem




Insert the handlebar (4) into the stem clamp and secure by tightening the two Allen Bolts. Ensure the bolts are tightened evenly.

4. Test The Tightness Of The Stem Bolt And Handlebar Clamp

Brace the front wheel between your knees and try to move the handlebars up and down and from side to side. The handlebars are secure within the stem and the stem within the fork steering tube if no movement is detected when applying turning pressure.

5. Rear Tube and Rear Wheels Assembly

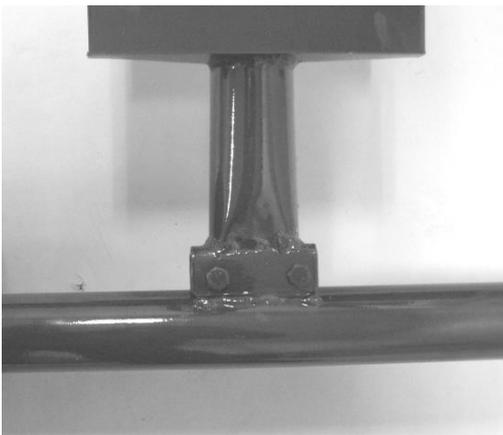

Attach the rear tube (6) to the main frame. Secure with two 8x50mm carriage bolts and Nuts (12). Slide one rear wheel onto the axle end, slide the rear axle (7) through the rear tube and slide another wheel. Secure both ends of axle with M8 washer and nut (14).

6. Seat Assembly



Attach the seat (10) to the main frame with the two 6x25mm bolts and nuts (13) provided.

7. Pedal Assembly



Attach the pedals (5) to the crank and tighten with spanner or adjustable wrench



CAUTION: There is a right pedal marked “R” and a left pedal marked “L”. Please ensure you assemble them on the correct side.

Care and Maintenance

Routine maintenance is an essential component of riding. The condition of your slider changes every time it is used, meaning more frequent maintenance is necessary the more you ride your slider. Please ensure you check all nuts and bolts are tight before each time your ride, and please check the brake before riding.



Do not return this product to the store!

If any parts are missing or damaged, please contact one of our Customer Service Representatives by phone on

1800 632 792(Australia)
0800 623 792(New Zealand)